
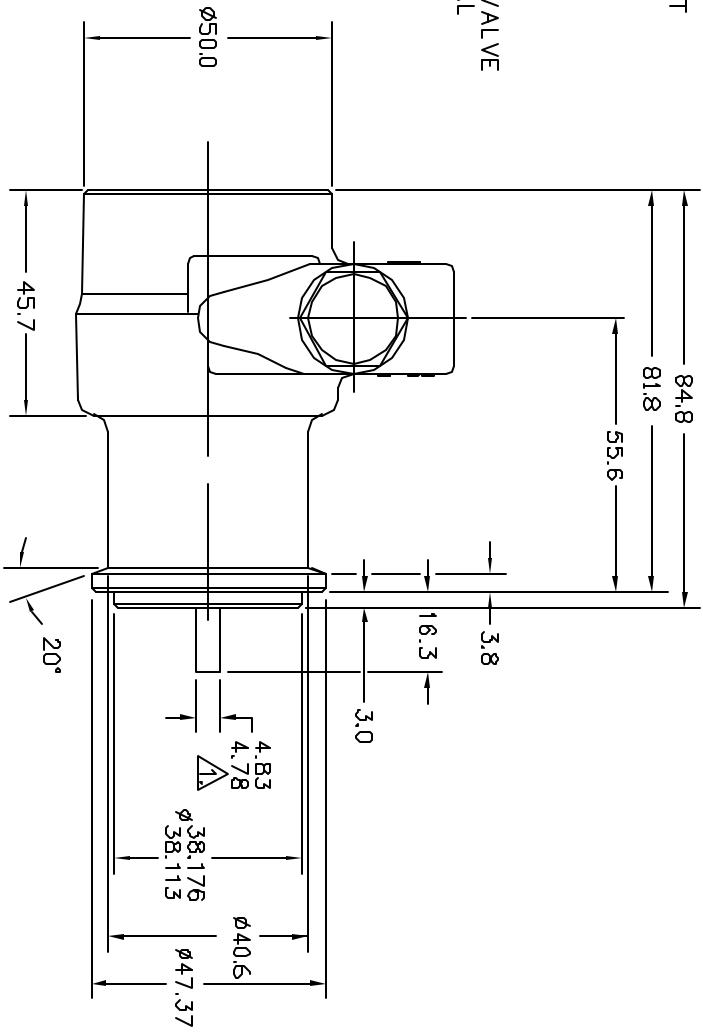


REV.	DATE	DESCRIPTION OF CHANGE	BY	APP'D
E	1-2-04	REVISED AND REBRAIN TO SHOW NEW LIGHTWEIGHT HOUSING	MEA	1-6-04

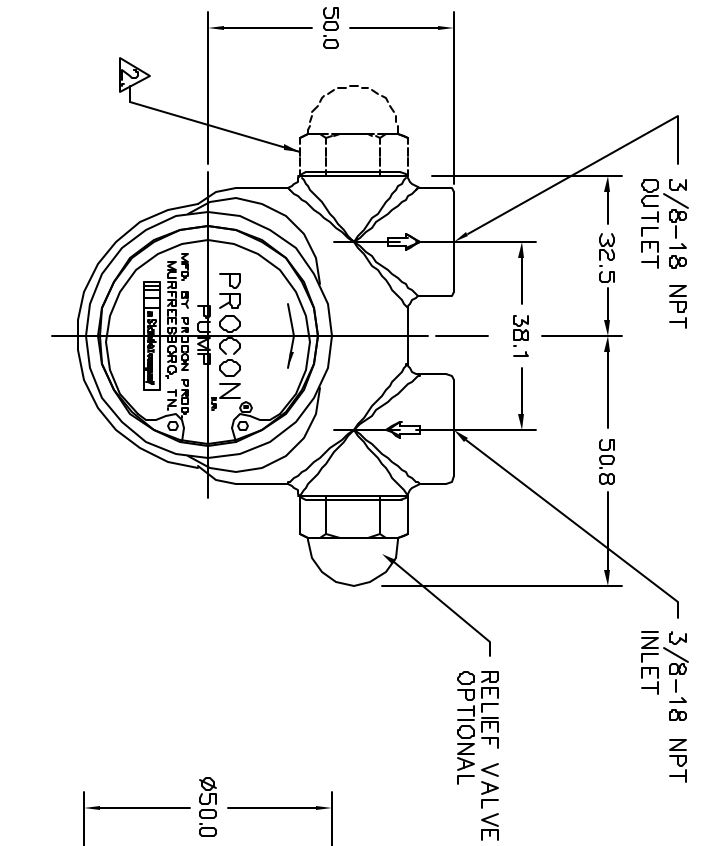

ALL DIMENSIONS ARE IN MILLIMETERS

- NOTES:
- ▲ SHAFT SIZE IS 11.07/11.05 ϕ .
 - ▲ FOR REVERSE ROTATION PUMP, THE RELIEF VALVE WOULD BE LOCATED ON THE OPPOSITE SIDE AND THE INLET PORT, OUTLET PORT, FLOW DIRECTION ARROWS, AND NAMEPLATE ARROW WOULD BE REVERSED.

PUMP CAPACITY @ 1450 RPM	
FLOW RATE	PRESSURE RANGE
48 AND 80 LPH	0 TO 1380 KPa
111 TO 445 LPH	0 TO 1720 KPa

MATERIAL	THIRD ANGLE PROJECTION	
UNLESS OTHERWISE SPECIFIED: REMOVE BURS AND SHARP EDGES. MACHINED SURFACE ROUGHNESS 3.2 MICROMETERS Ra.TOLERANCES: DIMENSIONS ARE REFERENCE	Procon Products A Division of Robbins Industries 11111 Industrial Blvd. Milwaukee, Wisconsin 53229	
THIS DRAWING CONTAINS CONFIDENTIAL INFORMATION AND IS THE EXCLUSIVE PROPERTY OF PROCON. IT IS NOT TO BE REPRODUCED OR TRANSMITTED IN ANY FORM, WITHOUT THE EXPRESS WRITTEN AUTHORITY OF PROCON.	TITLE OUTLINE, PUMP-SERIES "2" MOUNTING "A" 1/2" OR 5/8" VANE PUMP	SCALE FULL DRAWN MEA DATE 1-2-04 CHECKED DATE DRAWING NO. 2054
DO NOT SCALE DRAWING	SHEET 1	OF 1